




# BOTTOM BRACKET



The 3 in 1 Core System BB set can accommodate for three different crank spindle specifications. Easily switch between different cranks without the need to change the Bottom Bracket.

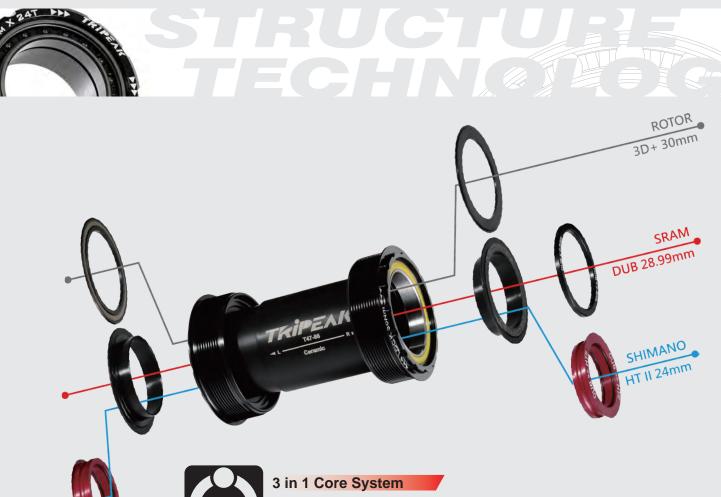

#### The BB tool

Compatible with the universal BB tool with an O.D. 44mm, eliminating the need for various specialized tools.



#### **Twist-Fit**

The Twist-Fit design accomodates press-fit BB specificied frames, making the BB installation and removal easier. Dual-sided locking enhances the precision of the spindle and avoids creaking noises, by achieving a perfect alignment between the bottom bracket and the crankset spindle.



#### **Snug Fit**

The patented plastic-steel bushing design is a big relief for Press-Fit frame BB users. It prevents wear on the frame's bottom bracket shell when the BB is pressed in. Snug Fit effectively eliminates noise and corrects bottom bracket tolerances.



#### G5 Ceramic Balls

The ceramic bearings of the TRIPEAK C-Series utilize G5-grade ceramic balls and are paired with precisely machined steel race, delivering excellent rotational performance for riders.

### P05

The TRIPEAK S-Series features P05 precision steel ball bearings, for reassuringly high smoothness and durability. 0.005 mm for eccentricity (out of roundness) of the track in the inner race. That's precise.



#### G3 Ceramic Balls

G3-grade perfectly round ceramic balls create lower rotational resistance, allowing your power better to convert to speed.

#### NC RACE



NC Race Bearings have a Nano coating on outter & inner races, This dry film can minimize the coefficient of friction to as low as 0.03 dynamic, and 0.07 for static. The Nano Coating overcomes or reduces mechanical lubrication problems improving performance and extending service life >300%



#### **ETERNA LV Fluid**

While Supra LV is focused on pure Performance of the Pulley Wheel, Tripeak chooses a different lubricant character for the ceramic bearing Bottom Bracket: The Eterna Low Viscosity (LV) Lubricant has the characteristics to be durable reliable and keep rotation silent.

#### **ZERO Contact Seal**



A non-contact bearing seal, provides complete coverage without increasing rotational resistance, striking the optimal balance between efficiency and protection.

### -NC Ceramic BB-

## JETSTREAM PRO

Jet Stream Pro NC Coated Ceramic Bearings BB introduces advanced NC Nano Coating for smoother performance and extended lifespan. With Twist-Fit installation and ZeroCreak technology, it ensures easy maintenance and eliminates noise.

Enjoy a 4-year warranty for worry-free riding!

### Thread Series




BB Shell Width	BB Shell DIA.	Shimano HTII SRAM DUB ROTOR 3D+ 24mm 28.99mm 30mm
BSA 68mm	34.8mm	3 IN 1 CORE SYSTEM
ITA <sup>70mm</sup>	36mm	3 IN 1 CORE SYSTEM
T47-68 68mm	47mm	3 IN 1 CORE SYSTEM
<b>T47-BC</b> 77.5mm	47mm	3 IN 1 CORE SYSTEM
<b>T47-86</b> 86mm	47mm	3 IN 1 CORE SYSTEM

#### Press fit Series



BB Shell Width	BB Shell DIA.	Shimano HTII SRAM DUB ROTOR 3D+ 24mm 28.99mm 30mm
BB30 68mm	42mm	3 IN 1 CORE SYSTEM
PF30 68mm	46mm	3 IN 1 CORE SYSTEM
BB Right	46mm	3 IN 1 CORE SYSTEM
BB 386 86mm	46mm	3 IN 1 CORE SYSTEM



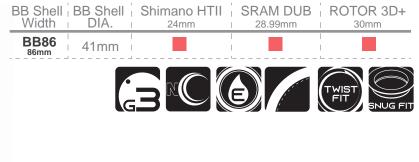





### -TWIST FIT BB-



### -TWIST FIT BB-



### -PRESS FIT BB-

